



**SM1682-50/
2082-50**

**Installation
Packet**


Other Specifications

Item	Unit	SM1682-50	SM2082-50
Air source	kg/cm ²	6.5	6.5
Electric power consumption	KVA	MIN.: 25 MAX.: 55	
Net weight	Kg	10800	12400
A24-type Net weight	Kg	11300	12900
A32-type Net weight	Kg	11900	13500
A40-type Net weight	Kg	12300	13900
Distance from Table Surface to Floor	mm	965	965
Coolant Capacity	l	440	440
Coolant Capacity	l	360	360
CTS CTS Capacity	l	20bar: 280 25bar: 550	20bar: 280 25bar: 550
(W*L*H) Packing Size (machine on pallet) Z=660	mm	40 A:3600*2320*2515 B:3970*2320*2230 C:3970*2320*2230	40 A:3970*2320*2515 B:3970*2320*2230 C:3970*2320*2230
(W*L*H) Packing Size (machine in wooden case)	mm	3255*4000	3255*4000

Note:

1. The weight will vary depending on the magazine, the tank and the option
2. Actual value may vary depending on accessory.

SM1682/2082 Foundation Diagram

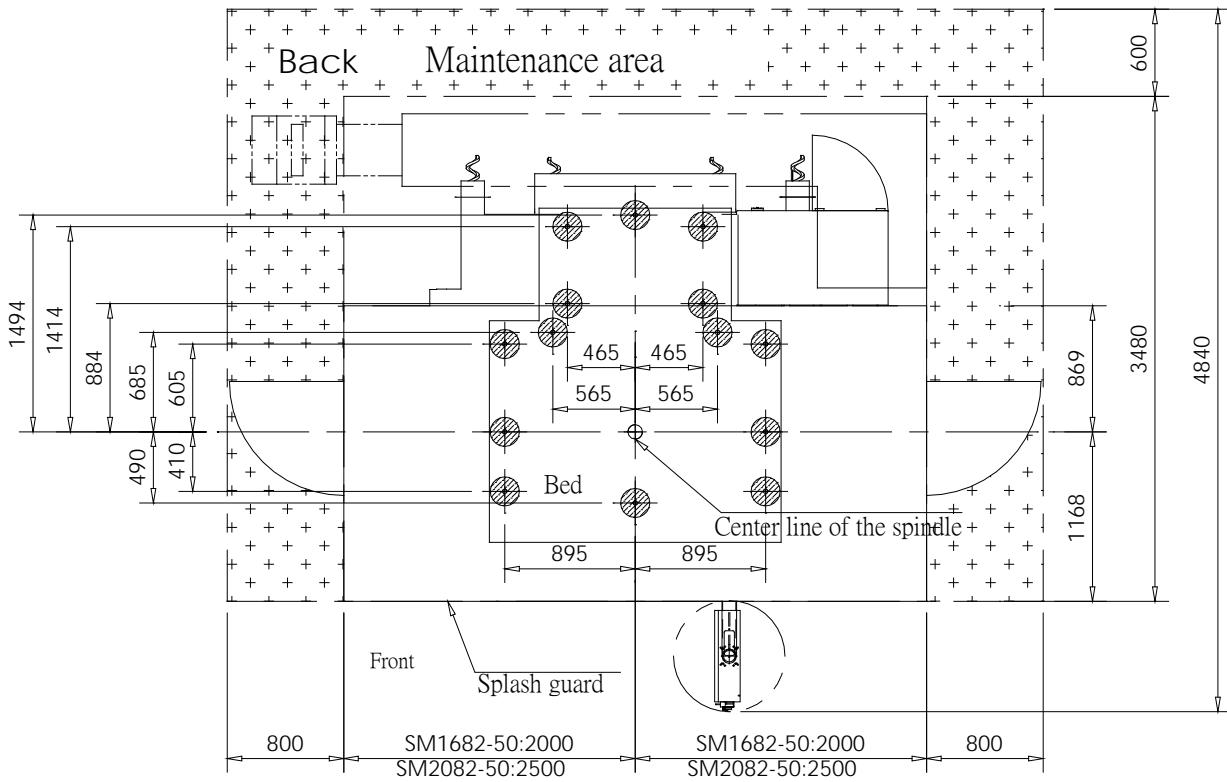

SM1682/2082 Link Type Chip Conveyor Profile Drawing

